




INSTALLATION AND MAINTENANCE GUIDE FOR A CONTINUOUSLY VARIABLE DRIVER PULLEY TRAILBLOC (09)

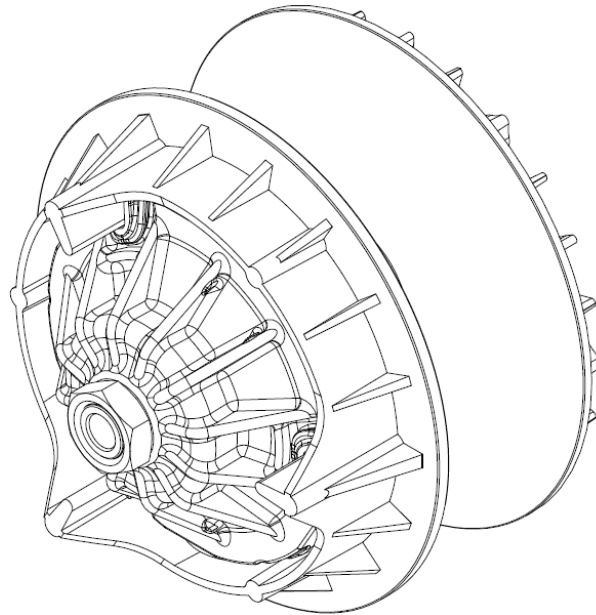

www.cvtech-ibc.com

CVTech-IBC inc.
300 Labonté St.
Drummondville (Québec)
Canada J2C 6X9

Document : 0946-5016-EN-rev4

October 2024

TABLE OF CONTENTS

IMPORTANT NOTICE	3
<i>MAINTENANCE FREQUENCY</i>	4
<i>NECESSARY HANDLING TOOLS</i>	5
<i>PULLEY INSTALLATION ON THE VEHICLE</i>	6
<i>PULLEY TIGHTENING</i>	7
<i>PULLEY REMOVAL FROM THE VEHICLE</i>	8
<i>DRIVE PULLEY DISASSEMBLY</i>	9-13
<i>DRIVE PULLEY RE-ASSEMBLY</i>	14-15

IMPORTANT NOTICE

Only qualified personnel should perform maintenance and repair operations on this continuously variable pulley.



Means there is a risk of serious injuries if the instructions are not followed as described.



Means that, when performing this step, there is a risk of damaging a part or may cause components malfunction.

CVTech shall not be liable for any damage or injury resulting from misunderstanding of the text, improper use of the transmission system, or improper use of the recommended tools.

It is very important to always use the indicated tightening torque.

MAINTENANCE FREQUENCY



This continuously variable pulley does not require any lubrication. It is designed to work without any lubricant. Given this, certain rules of cleanliness must be applied when handling the system to avoid having any lubricants come into contact with its components.



To increase the life of the continuously variable pulley, it is strongly recommended that you respect the following recommendations:

- Perform maintenance according to the table below
- Replace the worn parts. This ensures correct operation and will prevent any warranty from being excluded from the continuously variable pulley.

Description	Maintenance interval	
	Every 5 000 Km or 250 h	Every 10 000 Km or 500 h
Drive pulley	Visual inspection	Disassemble and Clean
Fixed sheave	Visual inspection	Clean
Sliding sheave	Visual inspection	Clean
Blocks	Visual inspection	Replacement recommended
Cap shoes	Visual inspection	Replacement recommended

NECESSARY HANDLING TOOLS




Figure 1

Appropriate socket for fixation bolt and 30 mm or 32 mm sockets (for the drive pulley nut, depending on the version of the pulley)




Figure 2

Torque wrench




Figure 3

**Retaining tool
(0155-1018)*




Figure 4

**Puller*

Refer to owner's manual for part number

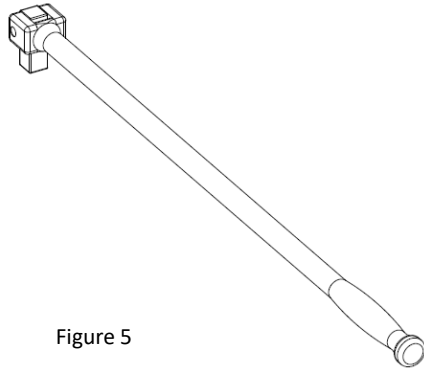


Figure 5

Breaker bar



Important: Using impact tools is not recommended.

**** Tool available from CVTech***

Document : 0946-5016-EN-rev4

October 2024

PULLEY INSTALLATION ON THE VEHICLE

Drive pulley installation

Assemble the drive pulley onto the engine shaft by passing it inside the belt first.

It is extremely important not to apply grease or lubricant on the cone of the engine shaft.

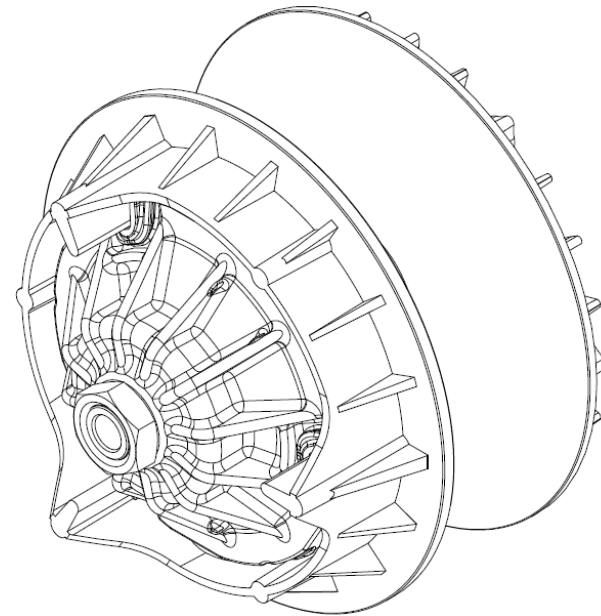


Figure 6

PULLEY TIGHTENING

Recommended torque: Refer to owner's manual

- Once the pulley is properly installed, use a torque wrench to tighten the fixation bolt.
- To tighten the drive pulley, use the retaining tool ① to lock the rotation.



Do not forget to remove the tools from the drive pulley.



Before you start the engine:

- Make sure all the components are clean without any trace of oil, dust and contaminants.
- Do not use any lubricants.



For optimal tightening force

- Repeat this tightening procedure after traveling a few kilometers with the vehicle.

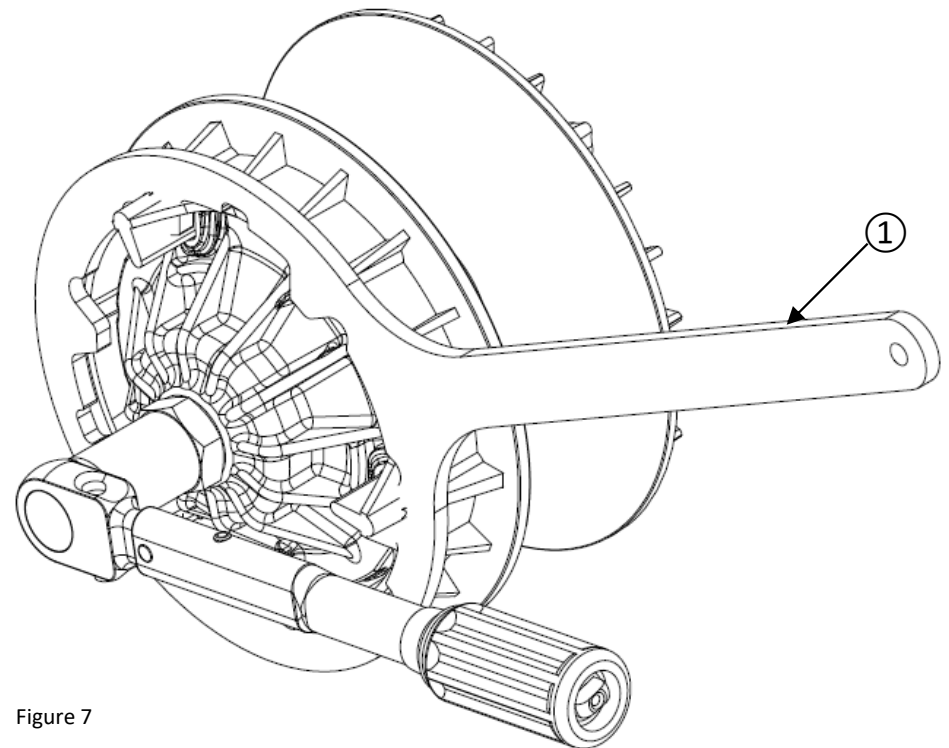


Figure 7

PULLEY REMOVAL FROM THE VEHICLE

Removing the drive pulley:

- Remove the fixation bolt from the drive pulley (you will need to use the retaining tool to prevent the pulley from rotating).
- Screw the puller in the drive pulley shaft and use a breaker bar; torque the puller until the pulley comes off.
 - Hint: apply grease on the tip and on the threads of the puller
 - If the pulley does not come off, please refer to the CVTech document #0046-5239 for complementary information on how to remove the drive pulley.

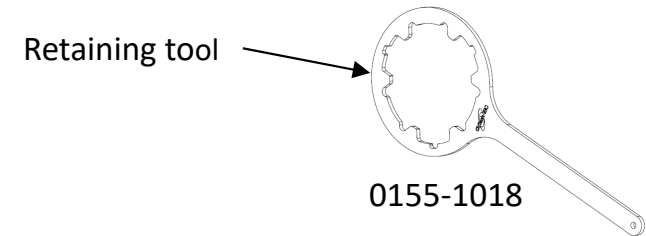


Figure 8

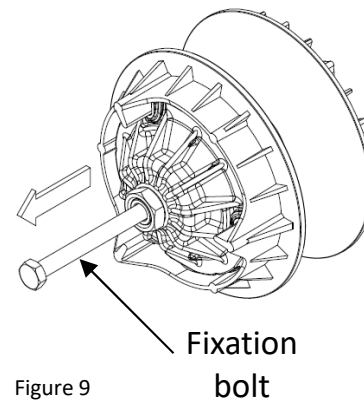


Figure 9



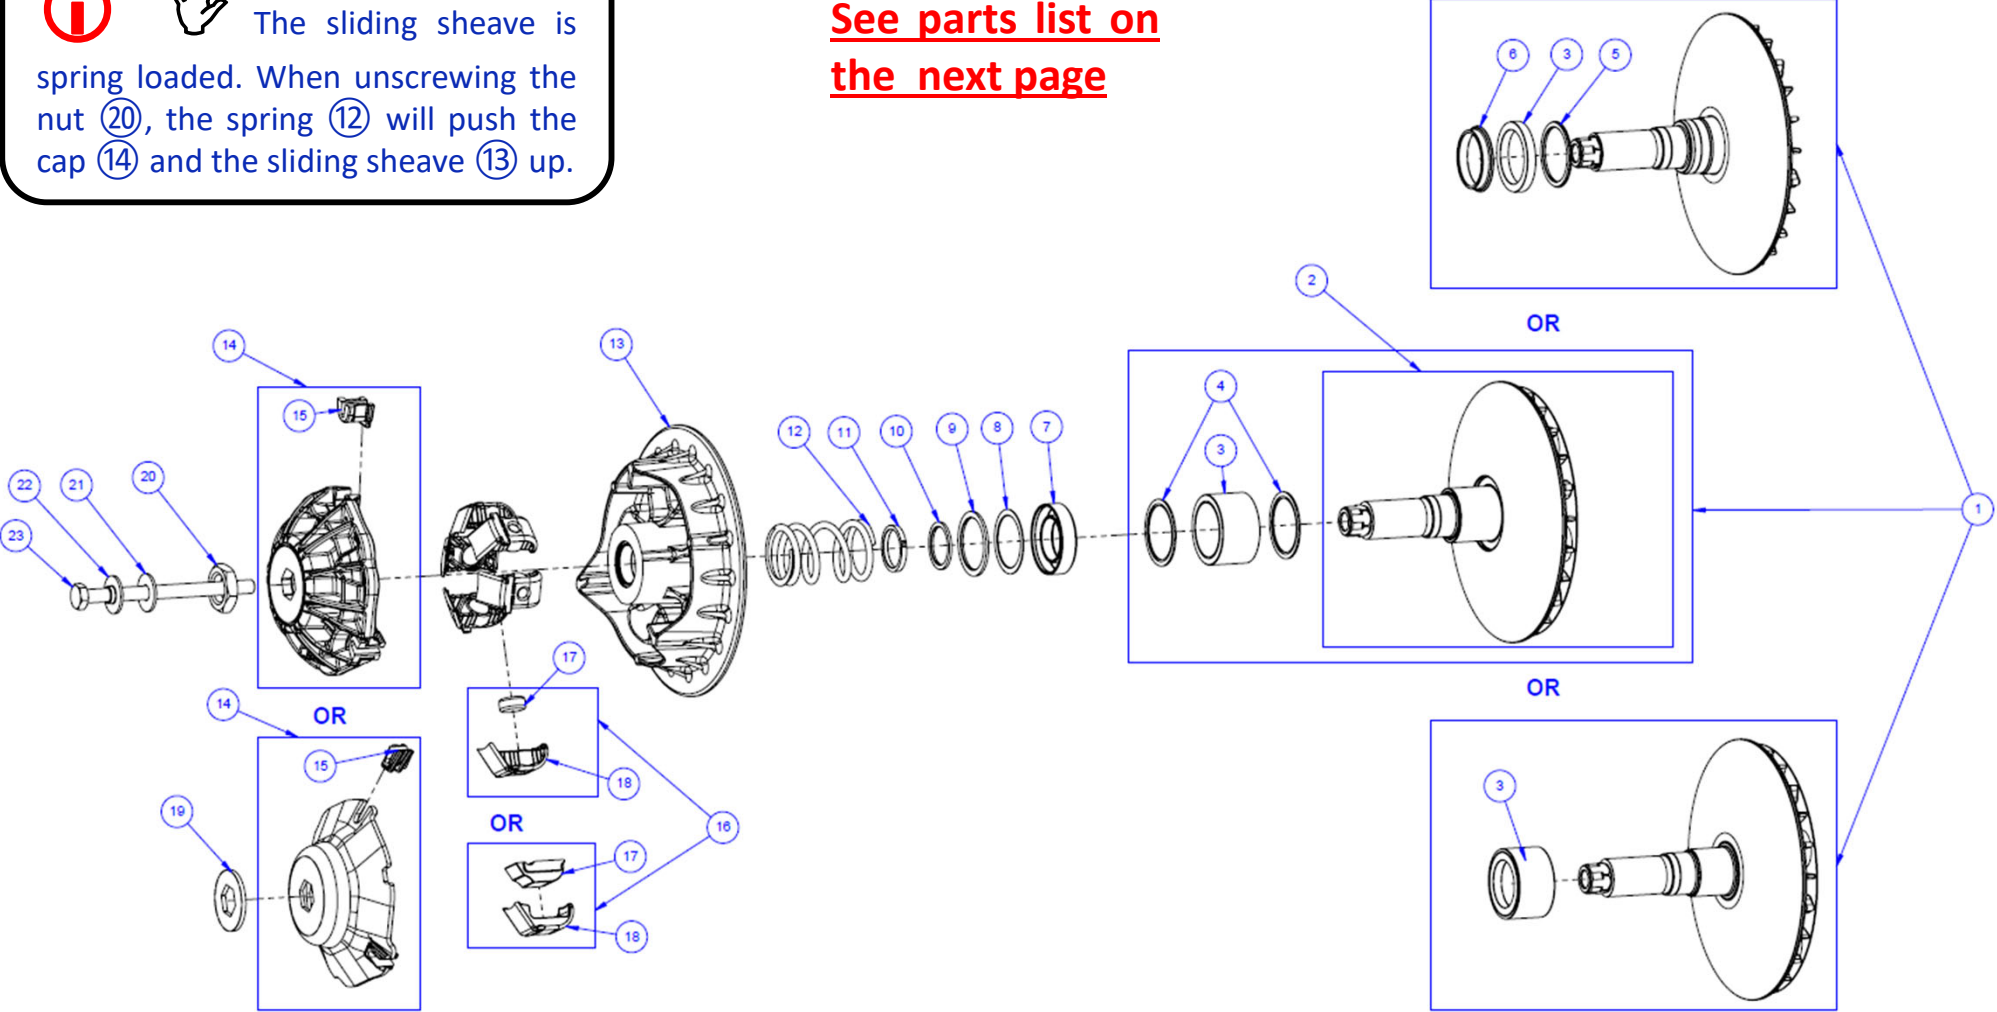


Figure 10

DRIVE PULLEY DISASSEMBLY

i  The sliding sheave is spring loaded. When unscrewing the nut ⑳, the spring ㉑ will push the cap ㉒ and the sliding sheave ㉓ up.

See parts list on the next page

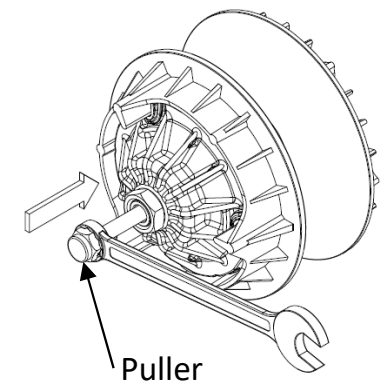

GENERIC DRAWING: THE DRAWING SHOWS ALL VERSIONS OF THE PULLEYS MANUFACTURED BY CVTech. THE PULLEY YOU ARE USING MAY DIFFER FROM THE IMAGE; SOME ITEMS MAY NOT BE FOUND ON YOUR PULLEY.

Figure 11

DRIVE PULLEY DISASSEMBLY

Parts list

- 1 Fixed sheave
- 2 Fixed sheave without bearing nor shims (if applicable)
- 3 Freewheel or idle bearing
- 4 Shims
- 5 Shim
- 6 Spacer
- 7 Spring seat
- 8 Shim (if applicable)
- 9 Shim (if applicable)
- 10 Shim
- 11 Stroke limiter
- 12 Spring
- 13 Sliding sheave
- 14 Cap
- 15 Cap shoe
- 16 Centrifugal mass
- 17 Mass
- 18 Block
- 19 Washer
- 20 Nut
- 21 Washer (if applicable)
- 22 Washer (if applicable)
- 23 Fixing screw

DRIVE PULLEY DISASSEMBLY



Pulleys using nuts (20) with adhesive (M22 threads only): should the nut (20) be removed from the pulley, the threads of the shaft will need to be perfectly cleaned up before being re-used.

CVTech-IBC strongly recommends using a brand new nut (20) and allowing a 24-hour curing period before using the pulley.

If the original nut should be re-used, it is important to flip it and it is imperative to apply Loctite #271 threadlocker (or equivalent) in the threads of the shaft prior to torquing the nut. Please, follow the instructions from the threadlocker manufacturer regarding the use of the threadlocker.



DRIVE PULLEY DISASSEMBLY

Remove each component as shown in the exploded view on page 9.

New block



Figure 12


Cap shoe




Figure 13

Recommended inspection and replacement

1. Check for wear marks on the blocks (18) (see figure 12 and 14).
 - 1.1 Change the blocks (18) when the wear marks shown in figure 14 exceed the wear limit. Admissible wear limit of the block is less than 14mm.

 Always change all 6 centrifugal blocks (18) at the same time.

2. Check for wear of the cap shoe (15) (see figure 13).
 - 2.1 Change cap shoes (15) when a 1mm feeler gauge enters between the cap shoe (15) and sliding sheave (13) tower or if the pulley makes too much noise at idle.

 Always change all 3 cap shoes (15) at the same time.

3. Check the Freewheel or idle bearing (3).
 - 3.1 Change the part when an irregular rotation is detected by hand or a creaky noise is heard when rotating the freewheel (3).

Worn block

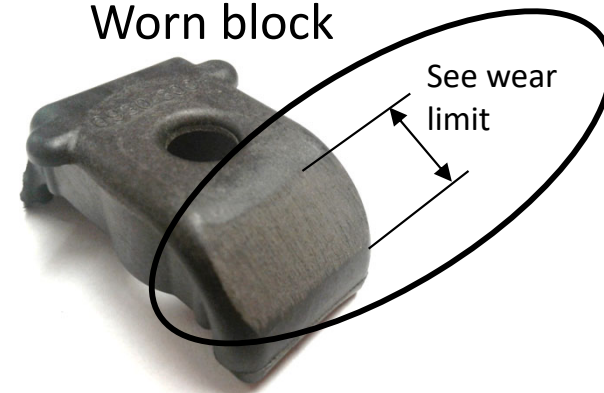


Figure 14

DRIVE PULLEY DISASSEMBLY

- Measure the spring ⑫ forces at the distances indicated on the CVTech website. For more specifications: www.cvttech-ibc.com



To maintain the performance of the pulley, make sure the sliding sheave ⑬ bushings are cleaned with a microfiber towel or dry cloth.

CAUTION: **Do not** use acetone to clean the bushings.

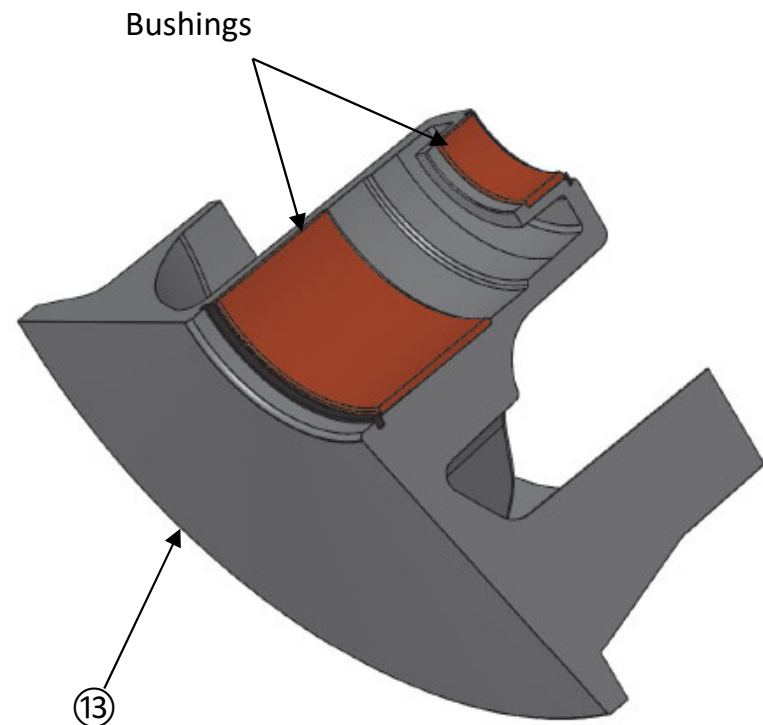


Figure 15

DRIVE PULLEY RE-ASSEMBLY

Alignment of fixed sheave ①, sliding sheave ⑬ and cap ⑭

- Align the 2 notches on the sheaves ① and ⑬ and also the square shape notch or point or part number on the cap ⑭ (depending on cap model) together to make sure the pulley is balanced (see figures 16 - 19).



If your pulley features a washer ⑲, make sure the alignment of the hexagon shape of the cap ⑭ and washer ⑲ are fully engaged on the shaft hexagon shape before applying torque to the nut ⑳ (see figure 20).

Hexagon top surface on the pulley shaft

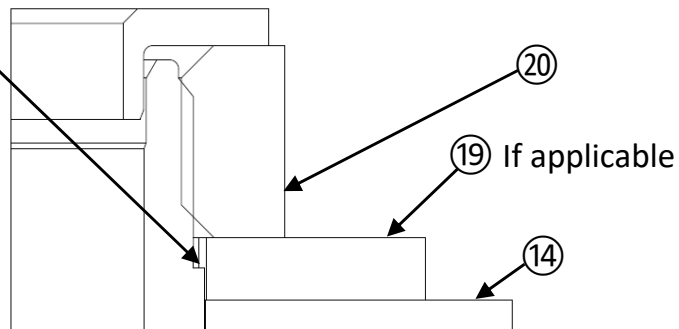


Figure 20

Square notch

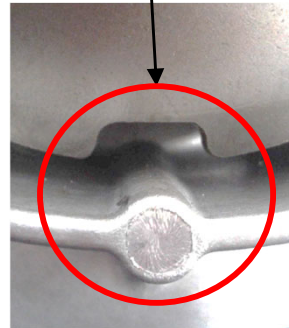


Figure 16

Dot



Figure 18

or

Part Number




Figure 17

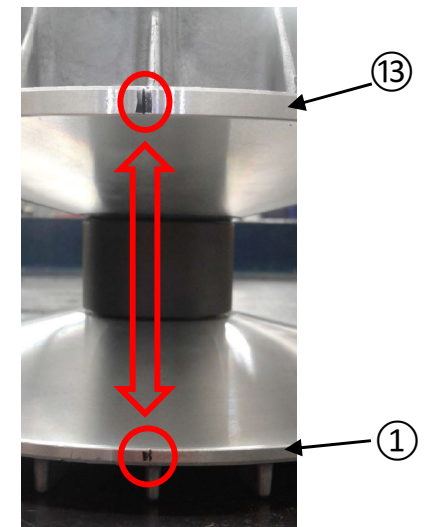


Figure 19

DRIVE PULLEY RE-ASSEMBLY



Make sure the threads of the shaft are perfectly cleaned up before being re-used – see page 11

Tightening the Pulley nut ⑳

- Use a torque wrench and a 30 mm or 32mm socket (depending on the version of pulley) to tighten the pulley nut ⑳ (for replacement pulleys, see the tightening torque chart by pulley number on the CVTech website – for OEM pulleys, refer to the owner’s manual). See figure 21.

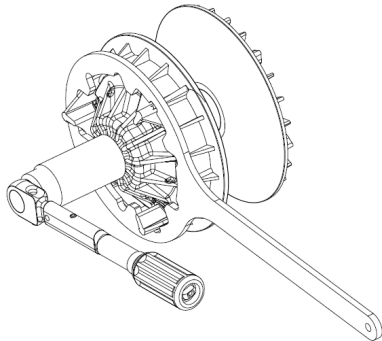


Figure 21



Use the tightening torque value listed on the tightening torque chart by pulley number on www.cvttech-ibc.com website or in the owner’s manual.